

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/090895 A1

(51) International Patent Classification⁷: F42B 3/12, 3/26, 3/103, H01R 13/58

(74) Agents: HUNTSMAN, Peter, Harold et al.; Davies Collison Cave, 1 Nicholson Street, Melbourne, Victoria 3000 (AU).

(21) International Application Number:

PCT/AU2005/000373

(22) International Filing Date: 16 March 2005 (16.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/553,954 18 March 2004 (18.03.2004) US


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): ORICA EXPLOSIVES TECHNOLOGY PTY LTD [AU/AU]; 1 Nicholson Street, Melbourne, Victoria 3000 (AU).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CONNECTOR FOR ELECTRONIC DETONATORS

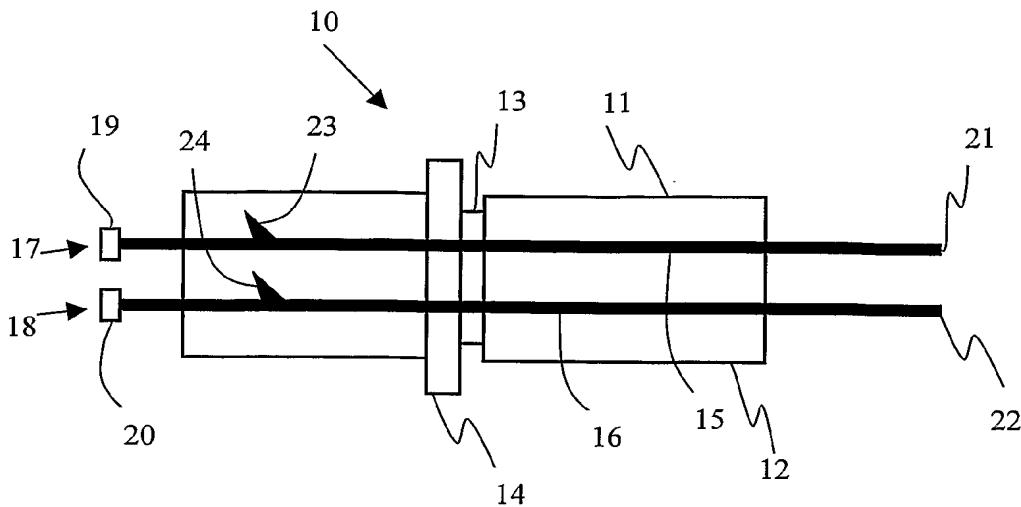

WO 2005/090895 A1

(57) Abstract: Fire, arm, and disarm signals are typically transmitted to electronic detonators via signal transmission lines. Traditionally, such signal transmission lines include wires wherein one end of each wire is soldered directly to printed circuit boards and / or other signal processing components retained within the shell of a detonator. Other 'modular' blasting apparatuses of the prior art provide means to connect signal transmission lines to detonators in the field. Signal transmission line / detonator contacts are susceptible to disruption, particularly when the signal transmission lines are subject to inadvertent tugging or tensile forces at the blast site. The present application discloses an electrical connector that enables secure connection between a signal transmission line and any detonator adapted to receive and optionally process electrical signals from the signal transmission line. Specifically, the electrical connector can be affixed to the signal input end of a detonator, and includes at least one bridge element to provide electrical contact between a signal transmission line, and internal electrical component(s) of the detonator.



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.